



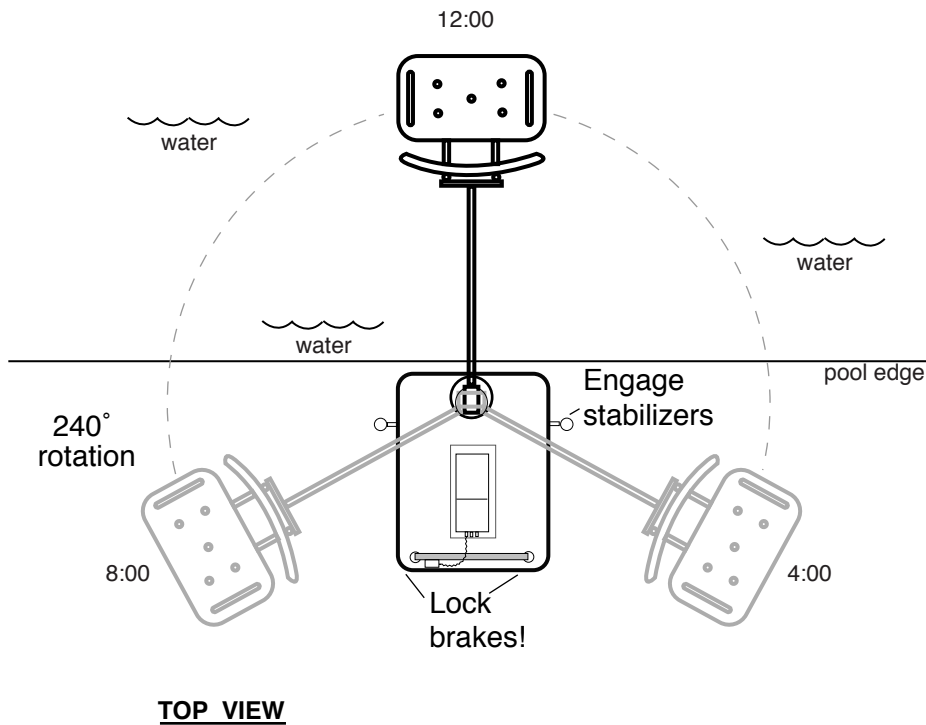

# Component Identification

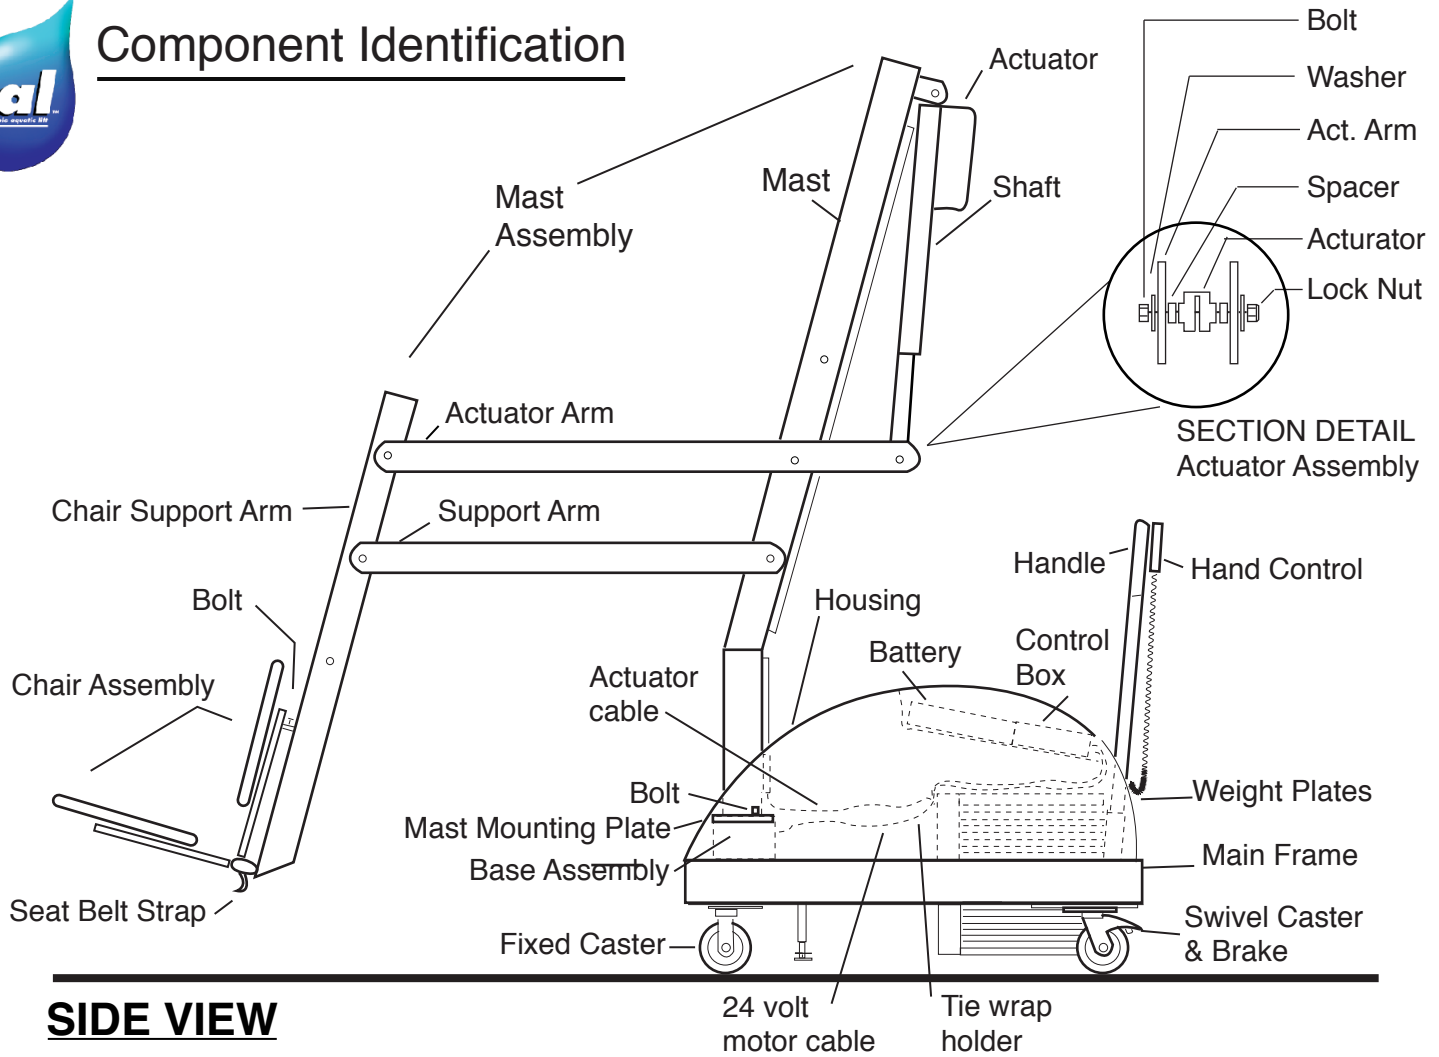

## TECHNICAL CHARACTERISTICS

- Lifting Capacity: 300 lb
- Lifting: Linak LA32 Mechanical Actuator
- Max. Thrust: 1680 lb
- Voltage: 24 VDC
- Max. Amp: 9
- Max. Speed: 0.59 inch/sec.
- Rotation: ITT SWMK 403.033 24 VDC 13 RPM
- Gearing Ratio 9:1
- Power: Linak Battery Pack BAJ1 24 VDC, IP65 Gel Lead Acid

## MATERIALS & FINISH

- Arms: Powder Coated Aluminum
- Mast: Powder Coated, Zinc Plated Steel
- Handle: Powder Coated Aluminum
- Housing: Vacuum Formed ABS Plastic

## CASTERS

- Front: Tente 8477 Precision Ball Bearing, Stainless Steel, 5" total lock swivel
- Rear: Tente 5328 Precision Ball Bearing, Stainless Steel, 5" fixed Polyurethane Tread

## DIMENSIONS

- Weight: 850 lb
- Overall Height: 73. in
- Base Height: 23.5 in
- Base Length: 37.25 in
- Base Width: 29.25 in
- Clearance: 1.25" with stabilizer, 2" without stabilizer
- Overall Length (foot print): 85-91" fully extended, 66" in stored position

## RANGE OF MOTION

- Lifting:
  - Variable to suite needs of pool
  - 44" total travel with standard actuator
  - Seat Depth: 18-20" below water line
- Rotational: 240° total rotation, 120° from each side